

High Voltage Fuses

German DIN Standard

For Voltage Transformer Protection


Indoor and Outdoor Application



HV Fuse Links for Volt. Transf. Protect. $\phi = 45\text{mm}$ DIN 43625 · IEC 60282-1

Rated Voltage 額定電壓 (kV)	Rated Current 額定電流 (A)	Dimensions (mm) 尺寸		Part Number 型號	Rated Breaking Current 額定啟斷電流 (kA)	Minimum Breaking Current 最小熔斷電流 (A)	Cold Resistance 冷電阻 (mΩ)	Power Loss 消耗功率 (W)	Weight 重量 (kg)
		E	D						
6 ~ 12	0.5	292	53	30 004 11 w/o striker pin	63	5	22130	6.1	1.6
	1					8	3510	4.8	
	2*401測試OK					16	1570	8.2	
	2.5			20		950	8.9		
	3.15			24		700	9.6		
	4			32		520	12		
	5			40		236	8.3		
10 ~ 24	2*401測試OK	292	53	30 180 13	63	16	2850	15	2.0
	0.5			30 006 11 w/o striker pin		5	40550	11.2	
	1	442		30 006 13		8	6450	8.6	2.2
	2*401測試OK					16	2850	15	
	2.5					20	1920	16	
	3.15					24	1300	18	
	4*401測試OK					32	950	22	
	5					40	433	15	

Time Current Characteristics & Dimensions

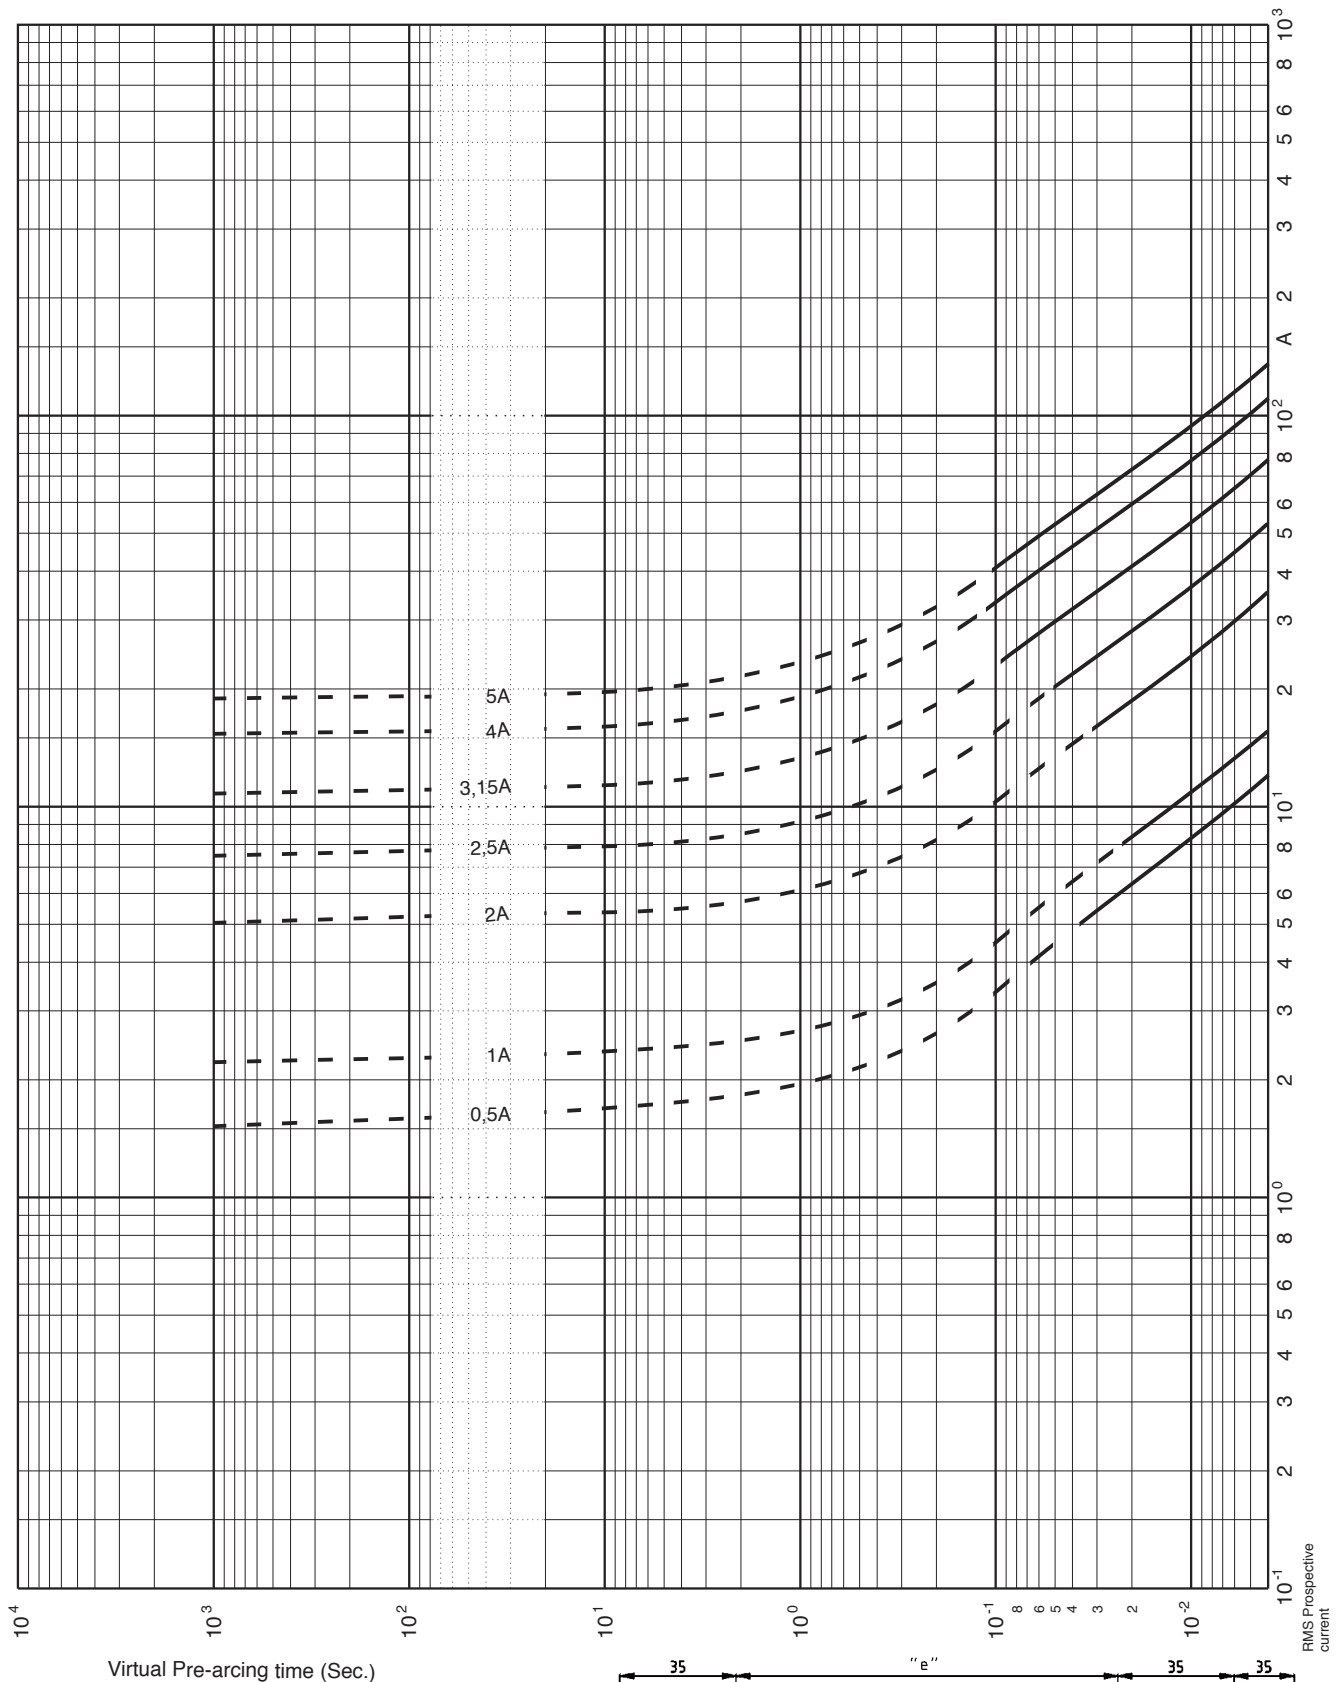

普得企業股份有限公司

總公司: 台北市內湖區行愛路68號6樓
 電話: (02)8791-8588 傳真: (02)8791-9588
 電子郵件: toyotech@ms37.hinet.net
 網址: www.toyotech.com.tw

台中辦事處: 台中市文心路四段200號10樓之2
 電話: (04)2296-9388 傳真: (04)2296-9386
 高雄辦事處: 高雄市民生一路56號15樓之6
 電話: (07)227-2133 傳真: (07)227-2173