

TOYO

EPOXY CASTING CURRENT TRANSFORMER




■ SPECIFICATION :

Type	TC-24WN			
Standard	IEC 60044-1			
Rated Voltage (kV)	24			
Insulation Voltage for 1 min. (kV)	50			
Impulse Withstand Voltage (kV)	125			
Primary Current (A)	5-10 ~ 300-600*			
Secondary Current (A)	1 or 5			
Accuracy Class	5P20 / 1.0	5P20 / 0.5	5P10 / 1.0	5P20 / 1.0
Rated Output (VA)	15 / 30	15 / 15	30 / 30	30 / 30
Secondary Windings	2 cores			
Over Current Strength	100 Times (1sec.)*			
Rated Frequency (Hz)	50 / 60			
Weight (kg)	about 23			




*For Primary Current above 600A please contact us.

*For 5P20/1.0/30/30VA the over current strength is 40 times (1sec.)

■ DIMENSION : (mm)

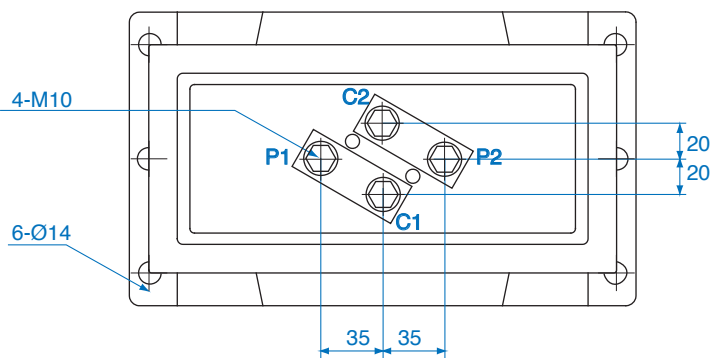

High Ratio: **P1-C1**、**P2-C2**
Low Ratio: **P1**、**P2** (C1-C2 short)

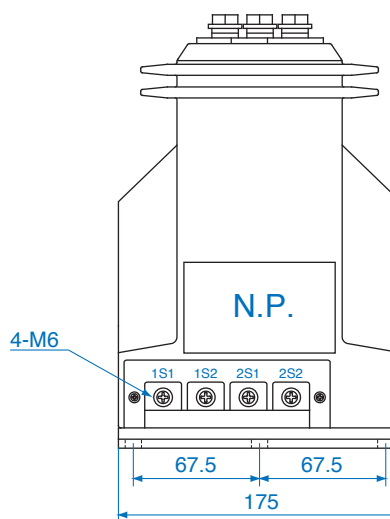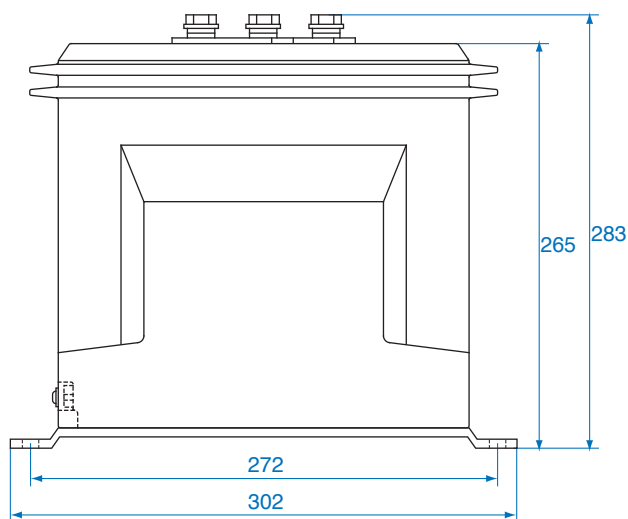

普得企業股份有限公司

總公司: 台北市內湖區行愛路68號6樓

電話: (02)8791-8588 傳真: (02)8791-9588

電子郵件: toyotech@ms37.hinet.net

網址: www.toyotech.com.tw

台中辦事處: 台中市文心路四段200號10樓之2

電話: (04)2296-9388 傳真: (04)2296-9386

高雄辦事處: 高雄市民生一路56號15樓之6

電話: (07)227-2133 傳真: (07)227-2173